

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
1 July 2004 (01.07.2004)


PCT

(10) International Publication Number
WO 2004/055467 A1

- (51) International Patent Classification⁷: **F41H 5/04**, B32B 15/01 (74) Agent: BELFÍN, Vladimír; P.O. Box 117, 272 80 Kladno (CZ).
- (21) International Application Number: PCT/CZ2003/000070 (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 15 December 2003 (15.12.2003) (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: PV 02-4127 17 December 2002 (17.12.2002) CZ
- (71) Applicant (*for all designated States except US*): SVOS s.r.o. [CZ/CZ]; Chocenská 877, 535 01 Prelouc (CZ).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): CERNÝ, Jaroslav [CZ/CZ]; Smetanova 1002, 535 01 Prelouc (CZ). ROLC, Stanislav [CZ/CZ]; Zborovská 28, 616 00 Brno (CZ). POSPÍŠIL, Frantisek [CZ/CZ]; Osiková 4, 637 00 Brno (CZ).
- Declarations under Rule 4.17:
— as to the identity of the inventor (Rule 4.17(i)) for all designations

[Continued on next page]

(54) Title: MULTILAYERED STEEL ARMOUR

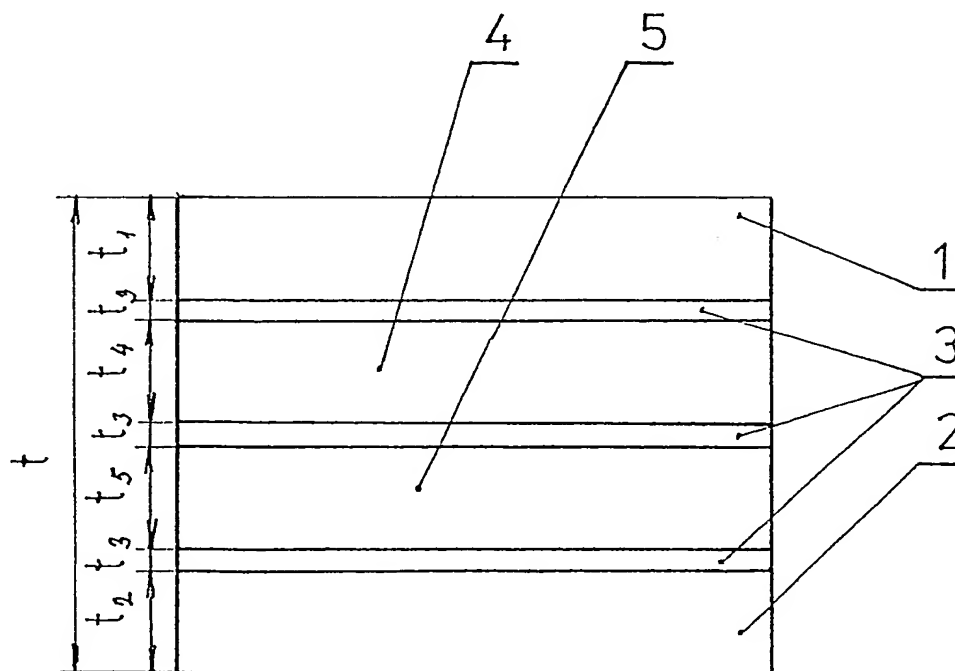

(57) Abstract: Multilayered steel armour consisting of the front-face ballistic-resistant armour layer (1) and the backing armour layer (2). Between the front-face ballistic-resistant armour layer (1) and the backing layer (2) is at least one joining metallic intermediate layer (3), joining the armour layers (1) and (2) and possibly at least one internal armour layer (4, 5).



- as to the identity of the inventor (Rule 4.17(i)) for all designations
- as to the identity of the inventor (Rule 4.17(i)) for all designations
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG)

- of inventorship (Rule 4.17(iv)) for US only

Published:

- with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

JC17 Rec'd PCT/PTO 17 JUN 2005

Multilayered Steel Armour

Field of the Invention

The invention relates to the multilayered steel armour for both the defense and civilian ballistic protection application.

Background of the Invention

5 The techniques of armouring applied both in civilian and defense realms make use of the various monolithic and/or composite steel armours in the role of assembly components and parts. Hand in hand with the ever-increasing requirements of the degree of the ballistic protection the technical capacity to meet
10 such requirements has become virtually exhausted when only monolithic armour materials are concerned and therefore we have been recently witnessing a gradual shift of emphasis towards the application and use of two-layered materials bonded together.

15 These two-layered steel armour plates are usually made from a suitable combination of two kinds of materials having quite different properties. The front-face layer intended to break or shatter attacking bullets is usually made from the steel of very high hardness
20 containing, for example, 0.5 wt% to 1.5 wt% of carbon, 0.2 wt% to 2.0 wt% of manganese, 0.1 wt% to 1.5 wt% of silicone, 0.2 wt% to 8.0 wt% of chromium, 0.1 wt% to 4.0 wt% of nickel, 0.2 wt% to 6.0 wt% of tungsten, 0.05 wt% to 0.5 wt% vanadium and the rest being iron
25 and other accompanying elements and impurities.

- 2 -

The backing layer is formed by the more conventional armour steel material, intended to absorb remainder of bullet and fragments kinetic energy with a higher toughness containing, for example, 0.2 wt% to 0.6 wt% of carbon, 0.3 wt% to 2.0 wt% of manganese, 0.1 wt% to 2.0 wt% of silicone, 0.1 wt% to 3.0 wt% of chromium, 0.2 wt% to 4.5 wt% of nickel, 0.1 wt% to 1.0 wt% of molybdenum and the rest being iron and other accompanying elements and impurities. These two-layered plates are produced using technology of explosive cladding (high-velocity impact cladding) or by rolling together the individual layers at elevated temperature, wide-area welding techniques, by casting and successive pressure forming or by welding the initial semi-finished products under the molten welding flux and other similar technologies.

The common disadvantage of all these two-layered steel armour plated is the widely different physical and technological properties of the front and the backing layer resulting in a considerable and undesirable changes of shape of the two-layered armor plates taking place both during their manufacturing process giving the plates the basic shape and during the thermal treatment of the completed and deployed armor. Another and very serious disadvantage of these two-layered armor plates is an ease with which the cracks are able to propagate themselves through the mass of the armour material once under a severe ballistic load.

- 3 -

Summary of the Invention

The above-described disadvantages associated with the two-layered techniques of armour design and manufacturing are to a great extent eliminated by application of the multilayered technology whereby the multilayered steel armours according to the invention are formed from the at least three layered sandwich comprising the front-face ballistic-resistance armour layer of high ballistic endurance, the backing armour layer and the joining metallic intermediate layer joining the two external armour layers together. This third joining metallic intermediate layer, or the combination of several intermediate layers represents the very substance of the invention described herein.

The important feature of the invention is the circumstance that the joining metallic intermediate layer is made from the material featuring the face-centered cubic crystalline lattice (FCC lattice).

The FCC metallic material of the intermediate layer used in the sandwich can be either the pure nickel or possibly also certain nickel alloys containing from 50.0 wt% to 98.0 wt% of nickel and from about 0.1 wt% to 45.0 wt% of at least one metal from the group of alloying elements such as chromium, molybdenum, manganese, niobium, titanium, iron and the rest formed by other accompanying elements and usual impurities.

Another convenient arrangement of the invention represents the material of the joining metallic intermediate layer comprising between 5.0 wt% to 50.0 wt% of nickel, in total between 0.1 wt% to 40.0 wt% of chromium, manganese, molybdenum, niobium and titanium

- 4 -

serving in the role of alloying admixtures while the remainder is formed by iron and some other usual additional elements and impurities.

5 In addition to the above-described compositions, the other convenient material of the joining metallic intermediate layer according to the invention is the alloy containing from 8.0 wt% to 30.0 wt% of manganese and altogether 0.1 wt% to 30.0 wt% of alloying
10 admixtures of chromium, nickel, vanadium, silicone and carbon while the remainder represents iron and other accompanying elements and impurities.

Specifically, the material of the joining metallic intermediate layer can be, in addition to pure nickel or an alloy with nickel as its principal component,
15 also the well known austenitic nickel steel alloys containing more than 20.0 wt% of nickel and the possible combinations of the known austenitic chromium-nickel alloys containing typically 18 wt% of chromium and 8 wt% of nickel. The other possible
20 option for the composition of the intermediate layer is the known austenitic manganese alloys like for example the Hadfield Steel with more than 12 wt% of manganese content.

The thickness of the joining metallic intermediate
25 layer can be conveniently set from 0.5 % to 25 % of the total thickness of the steel armour according to the invention. The thicknesses of the external front-face ballistic-resistance armour layer exposed to ballistic loads and the backing armour layer can be
30 either equal to each other or they can differ to achieve the most convenient properties of the sandwich as the whole.

- 5 -

The basic configuration of the invention represents the multilayered steel armour formed by just the three layers, i.e. the sandwich with the simple joining metallic intermediate layer placed between the front-face ballistic-resistant armour layer and the backing armour layer.

However, the alternative implementation of the herein invention can use more than just these three basic layers. Between the front-face ballistic-resistant armour layer and the backing armour layer at least one more extra internal armour layer is inserted. If this is the case, all the inserted internal armour layers are joined and sandwiched together using the above described joining metallic intermediate layers as per herein described invention.

The inserted internal armour layers used to achieve the most convenient properties of the entire structure are made from steel containing 0.2 wt% to 0.9 wt% of carbon, 0.1 wt% to 2.0 wt% of manganese, 0.2 wt% to 2.0 wt% of chromium, 0.3 wt% to 4.5 wt% of nickel, 0.1 wt% to 1.0 wt% of molybdenum, 0.1 wt% to 2.0 wt% of silicon and no more than about 0.01 wt% of boron, the remainder being iron and other accompanying elements and impurities.

When implementing this alternative mode of the hereby described invention the thicknesses of the inserted internal armour layers can be either equal to each other or they can mutually differ and the sum total of the thicknesses of all inserted armour layers and the corresponding joining metallic intermediate layers represents 1.5 % to 60 % of the total thickness of multilayered steel armour according to the invention.

- 6 -

The multilayered steel armour made to the specifications of the herein described invention result into compact armour structure with extremely high level of adhesion, strong metallurgical bond of the individual layers. The advantages of such composed structures manifest themselves in particular during giving these materials desired shape and during the thermal treatment of these materials and products. The joining metallic intermediate layer (or layers as case may be) due to their high plasticity eliminates deformations due to structural, thermal and dimensional changes taking place in the individual armour layers.

In addition to the above advantage of the multilayered steel armour according to the invention the other substantial advantage of these armoured plates manifest itself in the realm of their ability to withstand extremes of ballistic loads. The joining metallic intermediate layer represents an efficient barrier in the way of propagation of cracks between the individual armour layers whereby significantly enhancing the overall structural integrity of the armour.

The multilayered steel armour can be created using all the known and widely used technologies such as multilayered casting and forming, plating, cladding, welding, rolling at elevated temperatures, etc.

- 7 -

Brief Description of the Drawings

The invention will be further clarified in more detail using the schematic drawings, where is:

Fig. 1 - multilayered steel armour with three layers

Fig. 2 - multilayered steel armour with seven layers

Description of the Preferred Embodiment

Example 1

5 Multilayered steel armour according to this example, as in Fig. 1, comprises from the front-face ballistic-resistant layer 1 and from the backing armour layer 2.

10 The front-face ballistic-resistant armour layer 1 is made from steel alloy containing 0.66 wt% of carbon, 0.40 wt% of silicone, 0.40 wt% of manganese, no more than about 0.010 wt% of phosphorus, no more than about 0.010 wt% of sulfur, 1.20 wt% of chromium, 0.20 wt% of nickel, 0.20 wt% of vanadium, 1.90 wt% of tungsten,
15 while the rest is iron and other accompanying elements and impurities.

The backing armour layer 2 is made from the steel alloy containing 0.30 wt% of carbon, 1.60 wt% of silicone, 1.40 wt% of manganese, no more than about
20 0.010 wt% of phosphorus, no more than about 0.008 wt% of sulfur, 0.40 wt% of chromium, 1.20 wt% of nickel, the rest is iron and other accompanying elements and impurities.

- 8 -

- There is the joining metallic intermediate layer 3 located between the front-face ballistic-resistant armour layer 1 and the backing armour layer 2. This joining metallic intermediate layer 3 is the
- 5 austenitic FCC crystalline lattice structure containing 71.0 wt% of nickel, 16.0 wt% of chromium, 3.0 wt% of manganese, 1.0 wt% of molybdenum, 2.0 wt% of niobium, 6.0 wt% of iron and the rest being the accompanying elements and common impurities.
- 10 The overall thickness t of this multilayered steel armour is 10 millimeters. The thickness t_1 of the front-face ballistic-resistant armour layer 1 is 4.7 millimeters, the thickness t_2 of the backing armour layer 2 is also 4.7 millimeters and the thickness t_3
- 15 of the joining metallic intermediate layer 3 is 0.6 millimeters, which represents 6 % of the overall thickness t of the multilayered steel armour.

- The multilayered steel armour of this example is manufactured using the technology of explosive
- 20 cladding and subsequent rolling at elevated temperature.

Example 2

- Multilayered steel armour in this example represents the alternative implementation of the multilayered steel armour from the first example with the changed
- 25 material of the inserted joining metallic intermediate layer 3. The material of this layer 3 was changed to the austenitic structure containing 10.6 wt% of nickel, 16.7 wt% of chromium, 2.2 wt% of molybdenum, 1.7 wt% of manganese, 0.5 wt% of silicone, 0.4 wt% of
- 30 titanium, 0.03 wt% of carbon with the rest being iron

- 9 -

and other usual admixtures and impurities.

This multilayered steel armour is prepared using the technology of multilayered casting, which is followed by the elevated temperature rolling process. The total
5 thickness t of this multilayered steel armour is 7.5 millimeters, the thickness t_1 of the front-face ballistic-resistance armour layer 1 is 3.5 millimeters, the thickness t_2 of the backing armour layer 2 is 3.6 millimeters and the thickness t_3 of the
10 joining metallic intermediate layer 3 is 0.4 millimeters, representing 5.3 % of the overall thickness t of the steel armour.

Example 3

The multilayered steel armour in this (third) example also represents the alternative implementation of the
15 multilayered steel armour of the type introduced in the example 1. The difference is in a different composition of the joining metallic intermediate layer 3 joining the armour layer 1,2. The material of this layer 3 is the austenitic structure containing 12.5
20 wt% of manganese, 1.3 wt% of carbon, 0.4 wt% of silicone while the rest is iron, other accompanying elements and usual impurities.

The total thickness t of this multilayered steel armour as well as the thickness t_1 of the front-face
25 ballistic-resistant armour layer 1 and the thickness t_2 of the backing armour layer 2 and finally the thickness t_3 of the joining metallic intermediate layer 3 are identical to thicknesses of the example 2.

- 10 -

Example 4

The multilayered steel armour, as in Fig. 2 is formed by the front-face ballistic-resistant armour layer 1 and the backing armour layer 2, having the same chemical composition as the corresponding layers 1,2 of the example 1. Between the front-face ballistic-resistant armour layer 1 and the backing armour layer 2 are sandwiched two additional internal armour layers 4 and 5 and the corresponding joining metallic intermediate layers 3, which are located between all the armour layers 1,2,4,5 present in the sandwich.

The joining metallic intermediate layers 3 are the austenitic FCC crystalline structures containing 9.0 wt% of nickel, 17.5 wt% of chromium, 1.9 wt% of manganese, 0.6 wt% of silicone, 0.4 wt% of titanium, 0.06 wt% of carbon, while the rest being iron and the common accompanying elements and impurities.

The first inserted internal armour layer 4 is formed by the steel alloy containing 0.45 wt% of carbon, 0.70 wt% of manganese, 0.23 wt% of silicone, 0.50 wt% of chromium, 2.0 wt% of nickel, 0.35 wt% of molybdenum while the rest is iron and other common accompanying elements and impurities.

The second inserted internal armour layer 5 is formed by the steel alloy containing 0.26 wt% of carbon, 1.0 wt% of manganese, 1.19 wt% of silicone, 0.37 wt% of chromium, 0.95 wt% of nickel, 0.27 wt% of molybdenum, 0.006 wt% of niobium while the rest is iron and other common accompanying elements and impurities.

- 11 -

The total thickness t of the steel armour is 12.0 millimeters. The thickness t_1 of the front-face ballistic-resistant armour layer 1 is 3 millimeters and the thickness t_2 of the backing armour layer 2 is also 3 millimeters. The thicknesses of all joining metallic intermediate layers 3 are 0.4 millimeters. The thickness t_4 of the first internal armour layer 4 is 2.5 millimeters and the thickness t_5 of the second internal armour layer 5 is 2.3 millimeters. Thus, the sum total of the thicknesses t_3 of all inserted joining metallic intermediate layers 3 and the thicknesses t_4 , t_5 of the two inserted internal armour layers 4 and 5 is 6.0 millimeters, i.e. 50 % of the total thickness t of the multilayered steel armour.

The multilayered steel armour presented in this example was produced using the technology of welding of its individual armour layers 1,2,4 and 5 together with the joining metallic intermediate layers 3 and subsequent rolling of the sandwich at elevated temperature.

Field of the Application

Multilayered steel armour plates produced in accordance with the herein presented invention find a wide variety of applications especially in products of defense industry where the prime interest is to ascertain the high level of ballistic resistance of the armoured parts and simultaneously maintaining their structural integrity.

- 12 -

PATENT CLAIMS

1. The multilayered steel armour consisting of the front-face ballistic-resistant armour layer (1) and the backing armour layer (2), characterized by the fact, that between the ballistic-resistant face layer (1) and the backing layer (2) at least one additional joining metallic intermediate layer (3) is situated.
2. The multilayered steel armour according to claim 1 characterized by the fact, that the joining metallic intermediate layer (3) is made from the metal having its crystalline lattice arranged in FCC manner (face-centered cube lattice).
3. The multilayered steel armour according to claim 2 characterized by the fact, that the material of the joining metallic intermediate layer (3) is pure nickel containing from 98.0 wt% to 99.99 wt% of nickel, the rest being impurities of some kind or the other elements.
4. The multilayered steel armour according to claim 2 characterized by the fact, that the material of the joining metallic intermediate layer (3) contains between 50.0 wt% and 98.0 wt% of nickel, between 0.1 wt% and 45.0 wt% of at least one of the alloying elements such as chromium, molybdenum, manganese, niobium, titanium, iron and the rest making some other accompanying elements and usual impurities.

- 13 -

5. The multilayered steel armour according to claim 2 characterized by the fact, that the material of the joining metallic intermediate layer (3) contains between 5.0 wt% and 50.0 wt% of nickel, in total between 0.1 wt% and 40.0 wt% of chromium, manganese, molybdenum, niobium and titanium in the role of alloying elements, while the rest of the content is iron and other accompanying elements and usual impurities.
6. The multilayered steel armour according to claim 2 characterized by the fact, that the material of the joining metallic intermediate layer (3) contains from 8.0 wt% to 30.0 wt% of manganese, in total from 0.1 wt% to 30.0 wt% of chromium, nickel, vanadium, silicone and carbon in the role of alloying elements while the rest is represented by iron and other accompanying elements and usual impurities.
7. The multilayered steel armour according to at least one of the previous claims, characterized by the fact, that the thickness of the joining metallic intermediate layer (3) is between 0.5 % and 25 % of the total thickness of the steel armour.
8. The multilayered steel armour according to at least one of the previous claims, characterized by the fact, that there is at least one additional internal armour layer (4,5) placed between the front-face ballistic-resistant layer (1) and the backing armour layer (2) while the joining metallic intermediate layers (3) are arranged between all the armour layers (1,2,4,5).

- 14 -

9. The multilayered steel armour according to claim 8 characterized by the fact, that the inserted internal armour layer (4,5) is formed from steel containing from 0.2 wt% to 0.9 wt% of carbon, from 0.1 wt% to 2.0 wt% of manganese, from 0.2 wt% to 2.0 wt% of chromium, from 0.3 wt% to 4.5 wt% of nickel, from 0.1 wt% to 1.0 wt% of molybdenum, from 0.1 wt% to 2.0 wt% of silicone and no more than about 0.01 wt% of boron while the rest is formed by iron and other accompanying elements and usual impurities.
10. The multilayered steel armour according to at least one of previous claims 8, 9, characterized by the fact, that the sum total of all thicknesses of inserted internal armour layers (4,5) and joining metallic intermediate layers (3) is between 1.5 % and 60 % of the total thickness of the steel armour.

1/1

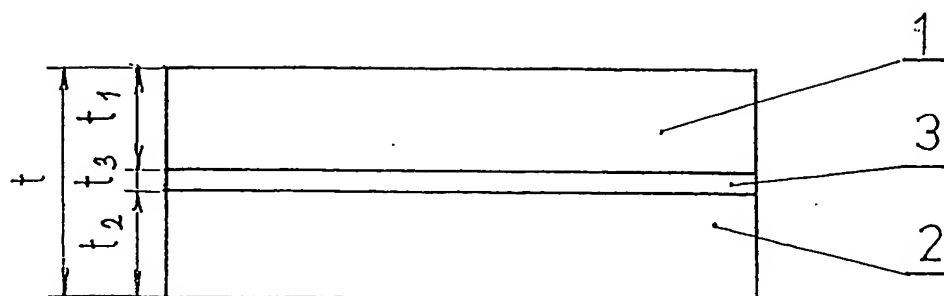


FIG. 1

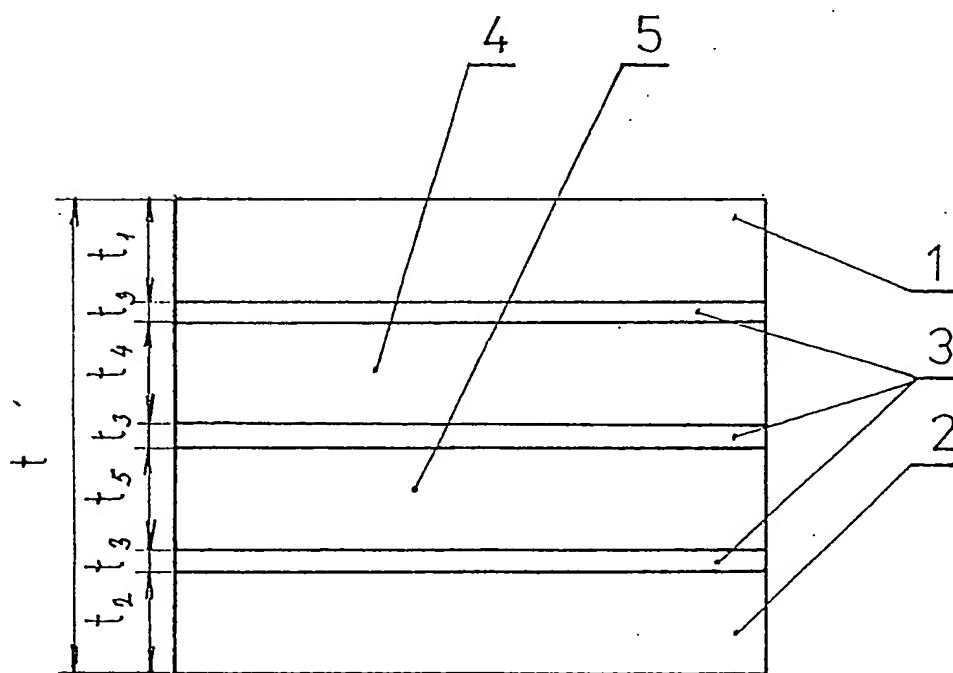


FIG. 2

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CZ 03/00070

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 7 F41H5/04 B32B15/01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F41H B32B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 43 44 711 A (DAIMLER BENZ AG) 20 July 1995 (1995-07-20) column 3, line 18-28 column 3, line 43-56; claim 5 ---	1,2,6-10
X	EP 0 247 020 A (VOEST ALPINE AG) 25 November 1987 (1987-11-25) column 2, line 39 -column 3, line 12 ---	1-4,7
P,X	US 2003/159575 A1 (REICHMAN STEVEN H) 28 August 2003 (2003-08-28) paragraph '0025! - paragraph '0029! ---	1,2,4,5, 7,8,10
X	FR 2 106 939 A (CREUSOT FORGES ATELIERS) 5 May 1972 (1972-05-05) page 1, line 38 -page 2, line 15 ---	1
	--- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

9 March 2004

Date of mailing of the international search report

16/03/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax: (+31-70) 340-3016

Authorized officer

Van der Plas, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CZ 03/00070

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 562 467 A (KINNEAR JR JAMES W) 31 July 1951 (1951-07-31) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CZ 03/00070

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 4344711	A	20-07-1995	DE 4344711 A1	20-07-1995
EP 0247020	A	25-11-1987	AT 109386 A	15-06-1993
			DE 3764867 D1	18-10-1990
			EP 0247020 A1	25-11-1987
US 2003159575	A1	28-08-2003	CA 2439955 A1	26-09-2002
			EP 1377788 A2	07-01-2004
			WO 02075236 A2	26-09-2002
FR 2106939	A	05-05-1972	FR 2106939 A5	05-05-1972
			DE 2142360 A1	27-04-1972
			SE 369488 B	02-09-1974
US 2562467	A	31-07-1951	NONE	

THIS PAGE BLANK (USPTO)